


TYPICAL REUSE SIGNAGE

NOT TO SCALE

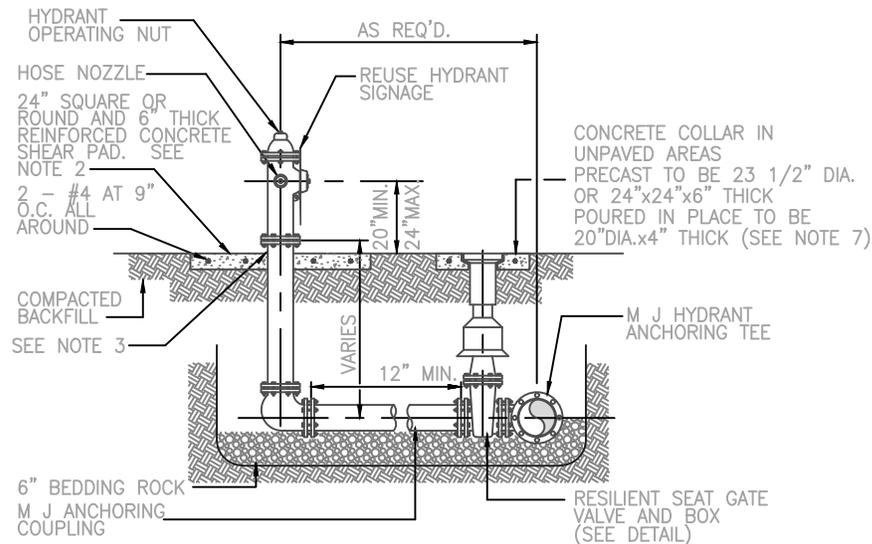

NOTES:

1. HYDRANT SHALL BE SUPPLIED WITH A WEEP HOLE.
2. THE DEVELOPER MAY INSTALL THE SHEAR PAD RECESSED UP TO 4 INCHES BELOW FINISHED GRADE AND SOD THE RECESSED SECTION.
3. CLEARANCE BETWEEN BOTTOM OF BOLTS AND TOP OF SHEAR PAD SHALL BE A 6" MINIMUM.
4. APPROVED HYDRANT MODELS ARE AMERICAN DARLING B-84-B, M+H A-129, & AVK. NO SUBSTITUTIONS WILL BE ALLOWED.
5. EPOXY PAINT HYDRANT PANTONE 522-C
6. ATTACH SIGNAGE SELECTED BY CITY AT PUMPER NOZZLE.
7. ALL VALVE COVERS TO BE PAINTED WITH EXPOXY PAINT. WATERMAIN (BLUE), FORCEMAIN (GREEN), & RE-USE (PURPLE)

REUSE HYDRANT ASSEMBLY DETAIL

NOT TO SCALE

REV	DATE	BY	REVISIONS
1	25 MAR 13	REFJHS	REVISED HYDRANT DIMENSION



WATER AND REUSE
REUSE HYDRANT
TECHNICAL STANDARDS MANUAL
CITY OF LYNN HAVEN FLORIDA

CAD FILE:	REUSE
DWN BY:	REF
DATE:	22 SEP 08
SHEET NO:	18 OF 18
DETAIL:	R-18