
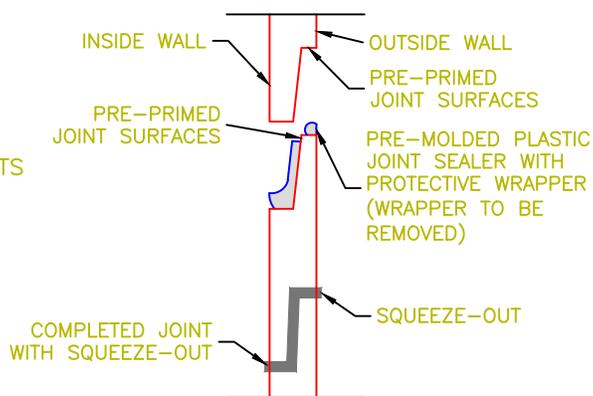


MANHOLE COVER USE  
U.S. FOUNDRY & MFG. CORP.  
USF 750 RING AND KI COVER  
ITEM No.9220022  
(SEE DETAIL S-4)

SET COVERS FLUSH IN  
PAVED AREAS & AT  
ELEVATIONS SHOWN IN  
UNPAVED AREAS.

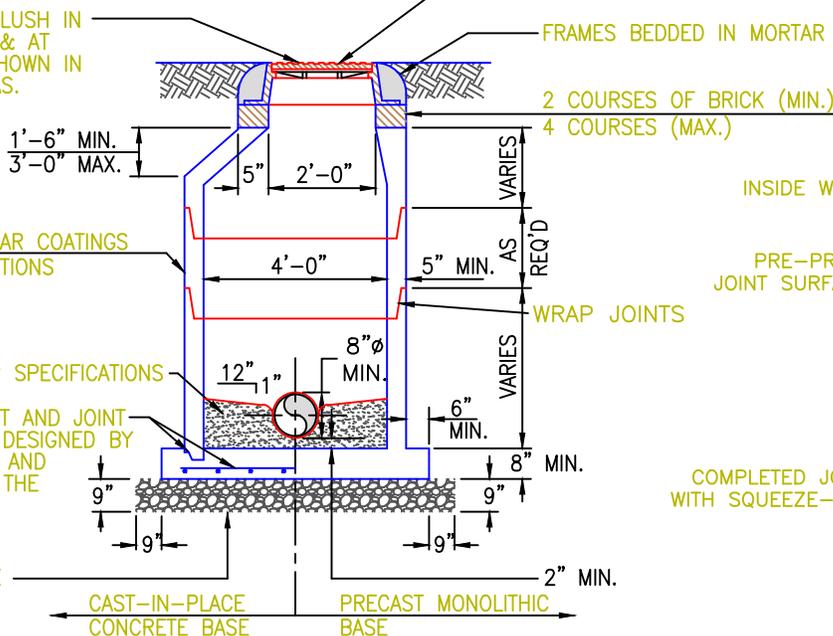

JOINT DETAIL

**NOTES:**

1. MANHOLE SHOWN IS FOR SEWER SIZE 8" THRU 24".
2. DROP CONNECTIONS MAY BE ALLOWED WHENEVER INVERT OF INFLUENT SEWER IS 24" OR MORE ABOVE THE MANHOLE. SEE MANHOLE CONNECTION DETAILS.
3. APPROVED CONCENTRIC CONE DESIGN MAY BE USED AS AN ALTERNATIVE.
4. GROUT INSIDE JOINT AREAS OF NEW SEWER MANHOLES
5. ALL MANHOLES SHALL HAVE INTEGRALLY CAST HDPE LINERS (HANSON OR APPROVED EQUAL)

**PRECAST CONCRETE MANHOLE  
PLAN AND SECTION**

REV	DATE	BY	REVISIONS
2	25 MAR 13	REFJHS	REVISED NOTES
1	20 JAN 11	REFJMS	REV MH CVR & ADDED JOINT DETAIL



**TECHNICAL  
STANDARDS  
MANUAL**

**PRECAST CONCRETE MANHOLE  
PLAN AND SECTION  
TECHNICAL STANDARDS MANUAL  
CITY OF LYNN HAVEN FLORIDA**

CAD FILE:	SEWER
DWN BY:	REF
DATE:	30 APR 07
SHEET NO:	1 OF 20
DETAIL	S1